SIX MARMI SERIES



GLAZED PORCELAIN






Six Marmi Blanc



Six Marmi Nero

Recommended applications

| Residential | Bath / Shower | 🕊 Wall |
|-------------------|---------------|---------|
| Light commercial | Fireplace | 🔎 Floor |
| Medium commercial | findoor | |

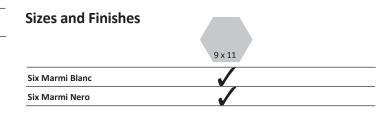

Characteristics of tile

| 🔏 Low maintenar | ce 🔆 Fade resistant | Resistant to fungus |
|-----------------|---------------------|----------------------|
| Stain resistant | Hypoallergenic | Mark Odour resistant |

Technical specifications

| | Pattern Repeat | n/a | ¥ | MOHS | n/a |
|----|------------------|-----|------------|------------------------|-------------------------|
| t, | PEI | n/a | P - | Tile thickness | 9 mm |
| * | Frost Resistance | n/a | 1 | Chemical Resistance | n/a |
| •• | Water Absorption | n/a | | Variation | V1 V2 V3 V4 Moderate |

Special instructions

Shade variations between tiles is characteristic. Colour may vary from sample. Technical data is supplied by the manufacturer and is subject to change at anytime. For rectangular tiles, for both floor and wall applications, it is not recommended to be installed using a 50/50 brick pattern. The only brick patterns acceptable are 40/60 or 30/70.

