
MACRO SERIES

PORCELAIN STONEWARE







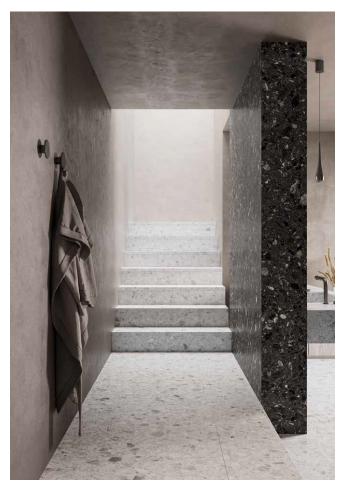





Macro Bianco Macro Carnico

Recommended applications

Ĥ	Residential	10000	Bath / Shower	W	Wall			
=	Light commercial	è	Fireplace	.0	Floor			
_	Medium commercial	110	Indoor					

Sizes and Finishes

	24x48
Macro Bianco Natural Rect.	
Macro Carnico Natural Rect.	

Characteristics of tile

Low maintenance	Fade resistant	Resistant to fungus
Stain resistant	Hypoallergenic	<i>™</i> ✓ Odour resistant

Technical specifications

Slip Resistance

■ Water Absorption

n/a

≤ 0.1%

	оп оросии						
	Pattern Repeat	n/a	*	MOHS		n/a	
99	PEI	n/a	P-	Tile thickness	;	10 mm	
**	Frost Resistance	Yes	İ	Chemical Resistance		GA Grade	
	Dynamic Coefficient of Friction	n/a	=	Variation	V1	V2 V3	V4
	Friction Coefficient	n/a			Slight		

Special instructions

Shade variations between tiles is characteristic. Colour may vary from sample. Technical data is supplied by the manufacturer and is subject to change at anytime. For rectangular tiles, for both floor and wall applications, it is not recommended to be installed using a 50/50 brick pattern. The only brick patterns acceptable are 40/60 or 30/70.

Burnaby: 4330 Halifax Street T: 604-298-6252 Port Coquitlam: 1110-1579 Kingsway Ave T: 778-948-9854 Nanaimo: 4337 Boban Drive T: 250-729-9766 Courtenay: 2-2989 Kilpatrick Ave T: 250-871-3122

